


INPUT 480 VOLTS 3Ø 3 OR 4 WIRE
 4TH WIRE NOT CONNECTED TO THE TRANSFORMERS

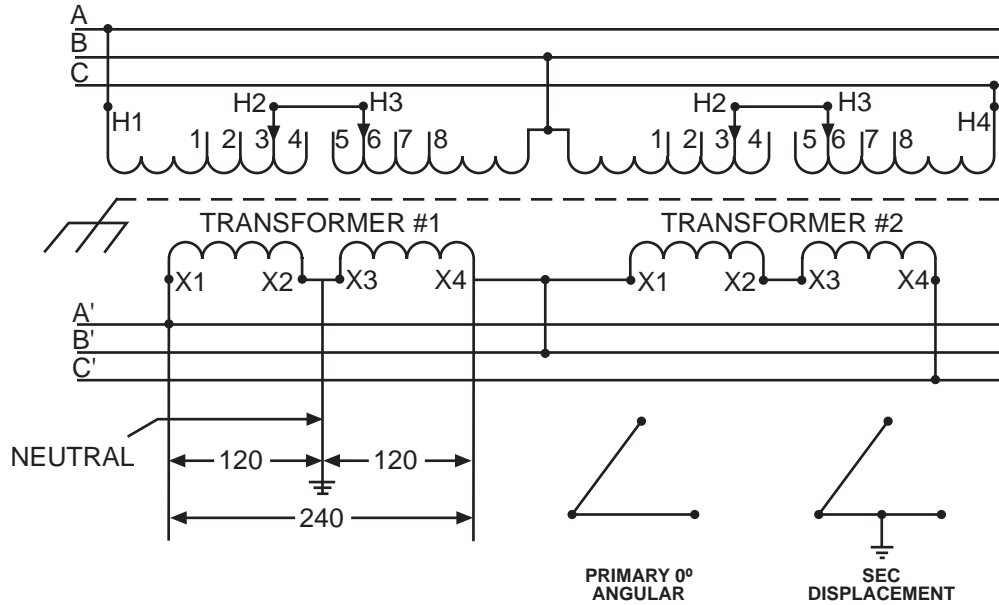

OUTPUT 240 VOLTS 3Ø 4 WIRE (HI LEG)
 BOTH 1Ø AND 3Ø LOADING MAY OCCUR SIMULTANEOUSLY.

VARIOUS 1Ø AND 3Ø LOAD COMBINATIONS ARE SHOWN ON PAGE 2 OF THIS SHEET

CAUTION:

DO NOT EXCEED THE MAXIMUM 1Ø AND 3Ø LOADINGS ON PAGE 2
 OTHERWISE OVERHEATING OF THE TRANSFORMER WILL OCCUR.

SEE NAMEPLATE DATA ON INDIVIDUAL TRANSFORMERS FOR VOLTAGE TAP SETTINGS

NOTE: DO NOT REVERSE INPUT & OUTPUT



Acme Electric Corporation

Power Distribution Products Division

4815 West Fifth Street
 Lumberton, NC 28358
 910-738-1121 Inside NC
 800-334-5214 Outside NC
 910-739-0024 Fax
www.acmepowerdist.com

TRANSFORMER #1		TRANSFORMER #2		MAXIMUM LOAD KVA AND AMPS - 1Ø AND 3Ø - WITH "HI-LEG" OPEN DELTA CIRCUIT*		
CATALOG NO.	NAMEPLATE KVA	CATALOG NO.	NAMEPLATE KVA			
T-2-53020-3S	50	T-2-53019-3S	37.5	1Ø { AMPS KVA OCCURRING AT THE SAME TIME AS	52	
					12.5	
					3Ø { AMPS KVA	156
						64.8
T-2-53021-3S	75	T-2-53020-3S	50	1Ø { AMPS KVA OCCURRING AT THE SAME TIME AS	104	
					25	
					3Ø { AMPS KVA	208
						86.5
T-2A-53022-3S	100	T-2-53021-3S	75	1Ø { AMPS KVA OCCURRING AT THE SAME TIME AS	104	
					25	
					3Ø { AMPS KVA	312
						129
T-1-53023-3S	167	T-2A-53022-3S	100	1Ø { AMPS KVA OCCURRING AT THE SAME TIME AS	279	
					67	
					3Ø { AMPS KVA	416
						173
T-2-53024-3S	250	T-1-53023-3S	167	1Ø { AMPS KVA OCCURRING AT THE SAME TIME AS	345	
					83	
					3Ø { AMPS KVA	695
						288

* DO NOT EXCEED THESE MAXIMUM 1Ø AND 3Ø LOADINGS. OTHERWISE OVERHEATING OF TRANSFORMERS WILL OCCUR.
FOR OTHER KVA COMBINATIONS OR LOAD APPLICATIONS, PLEASE CONTACT THE FACTORY.



**Acme Electric
Corporation**

Power Distribution Products Division

4815 West Fifth Street
Lumberton, NC 28358
910-738-1121 Inside NC
800-334-5214 Outside NC
910-739-0024 Fax
www.acmepowerdist.com