


INPUT 240 VOLTS DELTA 3Ø 60 HZ 3 WIRE

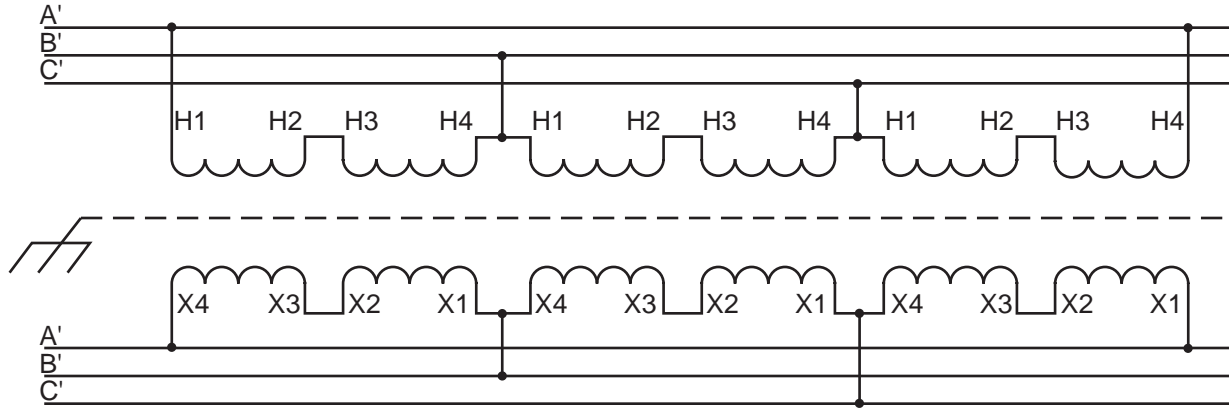

OUTPUT 240 VOLT DELTA 3Ø 60 HZ 3 WIRE

CATALOG NO.	3Ø KVA	QTY.
T-3-53040-S	3	3
T-3-53041-S	4.5	3
T-3-53042-S	6	3
T-3-53043-S	9	3
T-3-53044-S	15	3
T-3-53545-S	22.5	3
T-3-53546-S	30	3
T-3-53547-S	45	3
T-3-53548-S	75	3

INPUT AND OUTPUT CAN BE REVERSE CONNECTED.
ELECTROSTATIC SHIELDED WOUND FOR USE WITH APPLICATIONS
THAT REQUIRE TRANSIENT NOISE ATTENUATION.



4815 West Fifth Street
Lumberton, NC 28358
910-738-1121 Inside NC
800-334-5214 Outside NC
910-739-0024 Fax
www.acmepowerdist.com

A-125859