


OPEN DELTA HI-LEG
 INPUT 208 VOLT DELTA 3Ø 60 HZ 3 WIRE

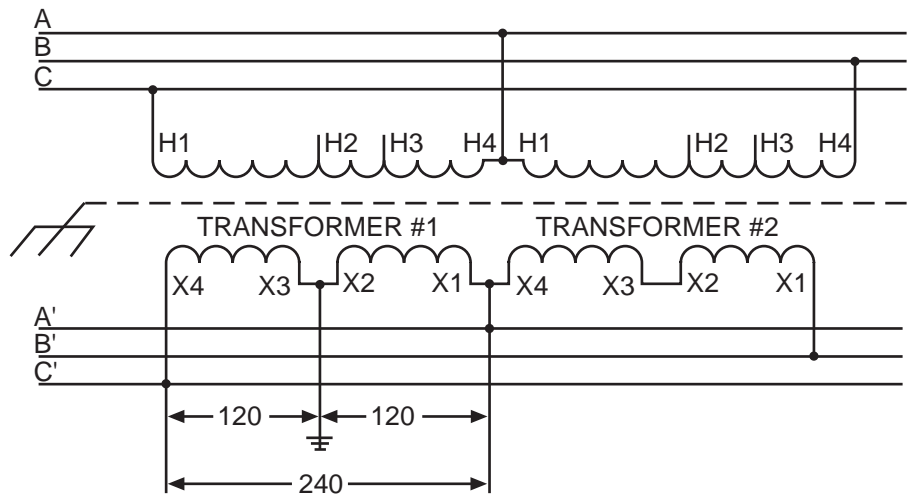

OUTPUT 120/240 VOLTS 3Ø 60 HZ 4 WIRE

TRANSFORMER #1		TRANSFORMER #2		KVA	
CATALOG NO.	QTY.	CATALOG NO.	QTY.	3Ø	1Ø
T-2-53141-1S	1	T-2-53140-1S	1	1.73	0.5
T-2-53142-1S	1	T-2-53141-1S	1	2.59	0.5
T-2-53143-1S	1	T-2-53142-1S	1	3.46	1.0
T-2-53144-1S	1	T-2-53143-1S	1	5.19	1.0
T-2-53645-1S	1	T-2-53144-1S	1	8.65	2.5
T-2-53646-1S	1	T-2-53645-1S	1	12.97	2.5
T-2-53647-1S	1	T-2-53646-1S	1	17.30	5.0
T-2-53648-1S	1	T-2-53647-1S	1	25.95	10.0

BOTH 1Ø AND 3Ø LOADING MAY OCCUR SIMULTANEOUSLY.
 CAUTION: DO NOT EXCEED THE MAXIMUM 1Ø AND 3Ø LOADING SHOWN
 OTHERWISE OVERHEATING OF TRANSFORMERS WILL OCCUR.



Acme Electric Corporation

Power Distribution Products Division

4815 West Fifth Street
 Lumberton, NC 28358
 910-738-1121 Inside NC
 800-334-5214 Outside NC
 910-739-0024 Fax
www.acmepowerdist.com